



KLEMMBRETTER

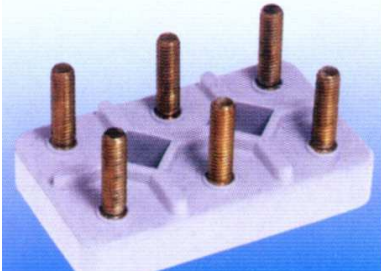

Versenkten Befestigungs -Langlöchern, kompl.m. Muttern, Beilagsch. u. Verbindungsstegen.

Type	Maße (mm)	Lochabstand (mm)	Bolzen
AK 205	40x25x10	11 bis 19	M3
AK 216	43x27x12	12 bis 20	M4
AK 225	56x36x13	16 bis 24	M5
AK 230	70x45x15	20 bis 32	M6
AK 250	95x60x21	30 bis 54	M8
AK 255	120x75x20	30 bis 60	M10


Mit 2 runden bzw. quadr. Befestigungslöcher

SN0	40x25x9	15	M3
SN1	50x32x10,5	18	M4
SN10	44x28x9,5	15	M4
SN2	56x36x12	20	M5
SN8	64x40x12,5	23	M5
SN3	71x48x13,5	25	M6
SN4	78x48x14,5	28	M6
SN5	82x52x16	30	M6
SN6	95x60x16	32	M8
SN7	114x70x19	35	M8
SN9	120x75x22	45	M10
SN1224	160x100x30	60	M12

Mit 4 versenkten Befestigungslöchern und 9 Bolzen

AK 500	44x44x11	15	M4
AK 510	56x56x12	20	M5
AK 520	70x70x15	25	M6
AK 530/S96	80x80x16	30	M8
AK 540	108x108x25	40	M10



Keramikklembretter

AK 311	54x34	20	M4
AK 310	50x35	21	M5
AK 313	78x48	28	M6

EX - KLEMMBRETTER

EX 1 = AK 610	54x34x14,5	20	S7x0,8
EX 0 = AK 612	37x60	23	S7x0,8
EX 2 = AK 615	64x40x19,5	23	S8x1
EX 3 = AK 620	78x48x18	28	S10x1
EX 4 = AK 625	96x60x21,5	35	S14x1,25
EX 5 = AK 630	120x75	45	S18x1,5

